


Réf : ECA401




ÉLINGUE CÂBLE 4 BRINS BOUCLES COSSÉES MANCHONNÉES ALU, CROCHETS À LINGUET

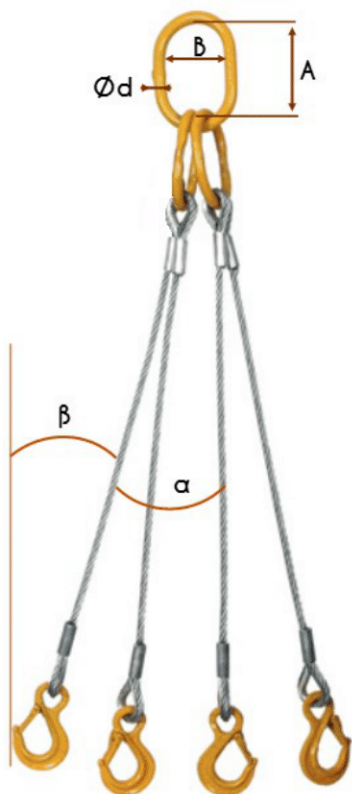

Diamètre du Câble mm	CMU en Kg $0^\circ < \beta \leq 45^\circ$ $0^\circ < \alpha \leq 90^\circ$ facture 2.1	CMU en Kg $46^\circ < \beta \leq 60^\circ$ $91^\circ < \alpha \leq 120^\circ$ facture 1.5	Dimensions maille A x B x Ø d	Passage crochets mm
8	1500	1050	120 x 70 x 16	28
10	2250	1600	135 x 75 x 18	28
12	3300	2300	150 x 90 x 22	29
14	4350	3150	150 x 90 x 22	31
16	5650	4200	170 x 95 x 25	31
18	7200	5200	200 x 120 x 28	40
20	9000	6500	200 x 120 x 30	40
22	11000	7800	250 x 150 x 36	40
24	13500	9400	250 x 150 x 36	47
26	15000	11000	250 x 150 x 38	47
28	18000	12500	280 x 170 x 44	64
32	23500	16500	300 x 200 x 45	64
36	29000	21000	300 x 200 x 50	90

Acier galvanisé - CMU établie sur base âme textile

Réf : ECA402

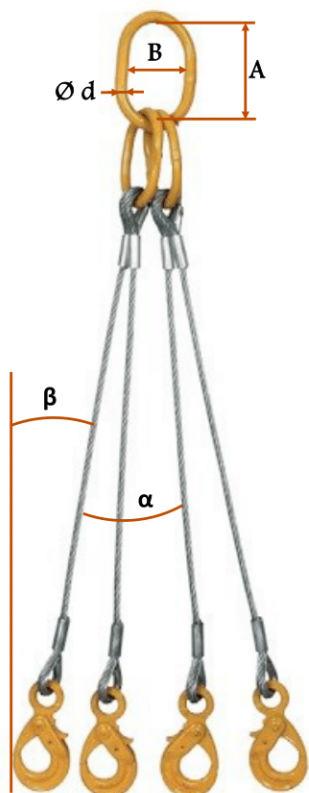

ÉLINGUE CÂBLE 4 BRINS BOUCLES COSSÉES MANCHONNÉES ALU, CROCHETS À VERROUILLAGE AUTOMATIQUE



Diamètre du Câble mm	CMU en Kg $0^\circ < \beta \leq 45^\circ$ $0^\circ < \alpha \leq 90^\circ$ facture 2.1	CMU en Kg $46^\circ < \beta \leq 60^\circ$ $91^\circ < \alpha \leq 120^\circ$ facture 1.5	Dimensions maille A x B x Ø d	Passage crochets mm
8	1500	1050	120 x 70 x 16	32
10	2250	1600	135 x 75 x 18	32
12	3300	2300	150 x 90 x 22	44
14	4350	3150	150 x 90 x 22	49
16	6560	4200	170 x 95 x 25	49
18	7200	5200	200 x 120 x 28	64
20	9000	6500	200 x 120 x 30	64
22	11000	7800	250 x 150 x 36	64
24	13500	9400	250 x 150 x 36	78
26	15000	11000	250 x 150 x 38	78
28	18000	12500	280 x 170 x 44	92
32	23500	16500	300 x 200 x 45	92
36	29000	21000	300 x 200 x 50	92

Acier galvanisé - CMU établie sur base âme textile